

**ebm-papst Mulfingen GmbH & Co. KG**

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	R3G250-AD62-30	
Motor	M3G084-CA	
Nominal voltage	VDC	48
Nominal voltage range	VDC	36 .. 57
Method of obtaining data		fa
Speed (rpm)	min ⁻¹	2645
Power consumption	W	135
Current draw	A	2.8
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	54.1	43.7
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		72.4	62
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_e	kW	0.18
09 Air flow q_v	m ³ /h	870
09 Pressure increase p_{fs}	Pa	360
10 Speed (rpm) n	min ⁻¹	2580
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$


LU-56153



Technical description


Weight	2.95 kg
Fan size	250 mm
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	Sheet steel, galvanized
Number of blades	11
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP42
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	- Control input 0-10 VDC / PWM - Tach output - Thermal overload protection for motor
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-3 (household environment)
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Conformity with standards	EN 60950-1; CE
Approval	CSA C22.2 No. 100; EAC; CCC; UL 1004-1

Product drawing

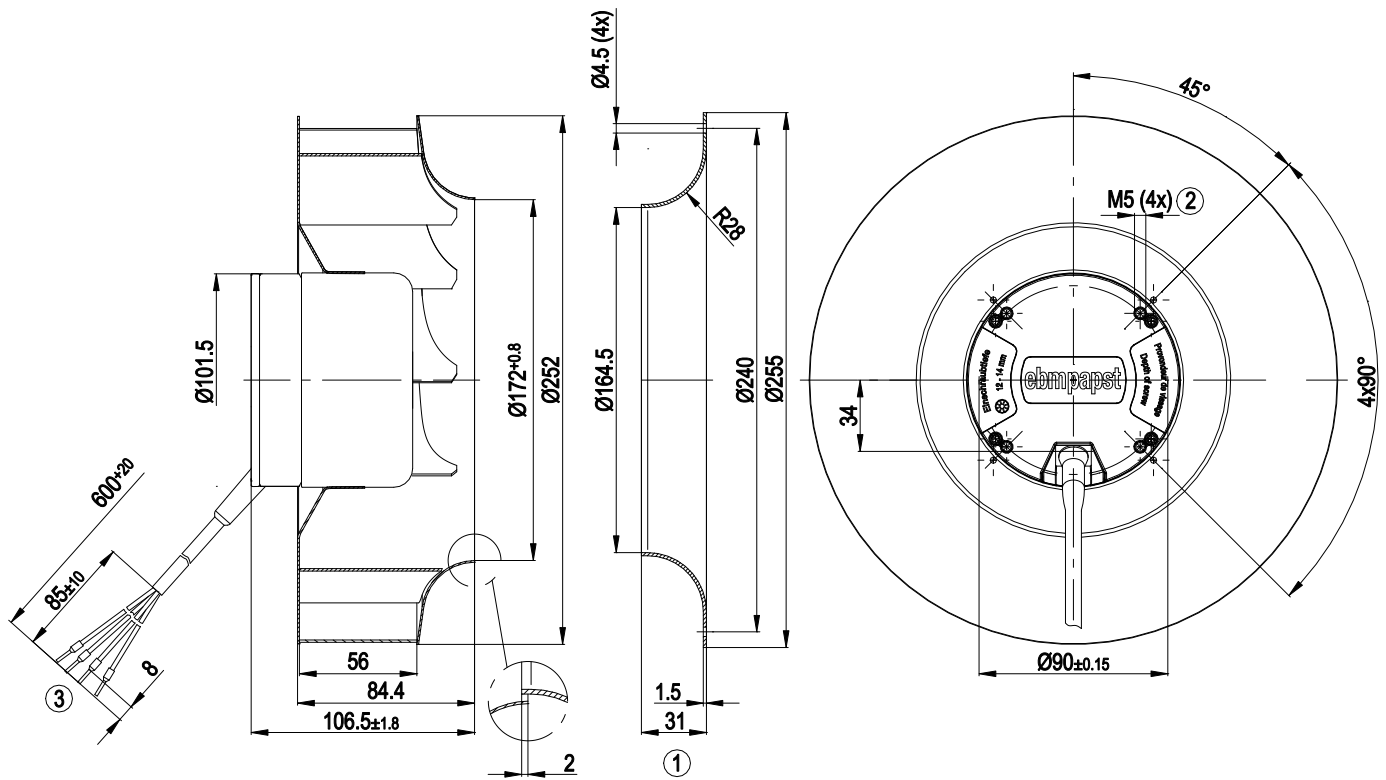


1	Accessory part: inlet ring 96359-2-4013 not included in scope of delivery
2	Clearance for screw 12 - 14 mm
3	Cable PVC AWG16, 4x crimped ferrules

Connection diagram

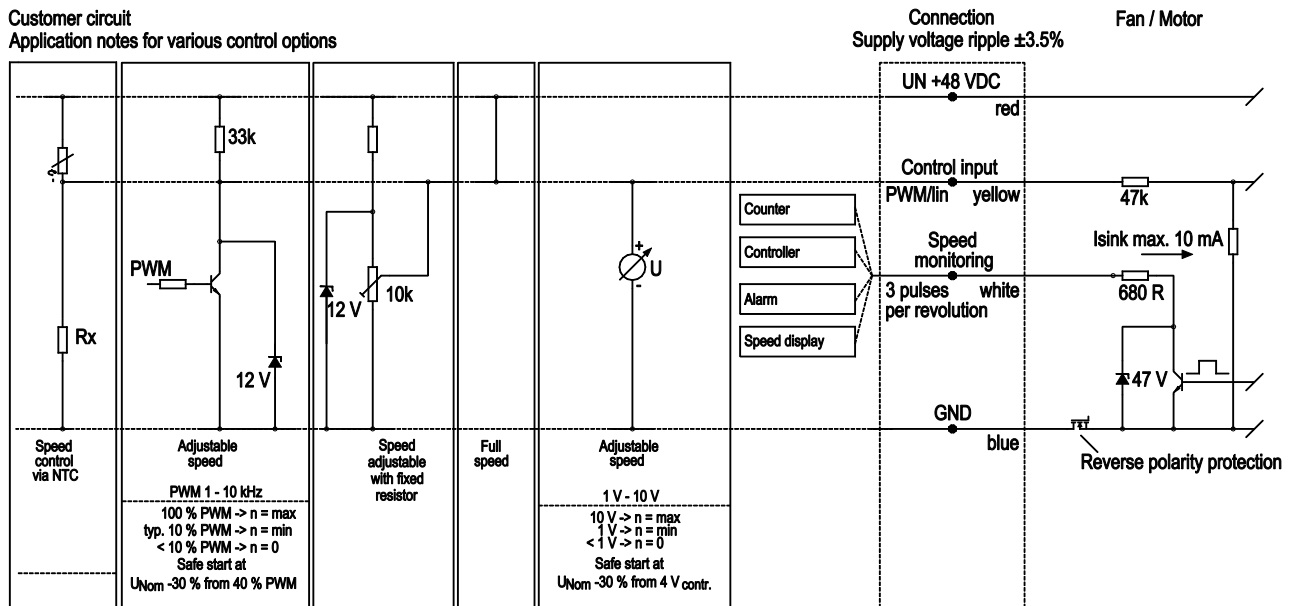

Curves: Air performance

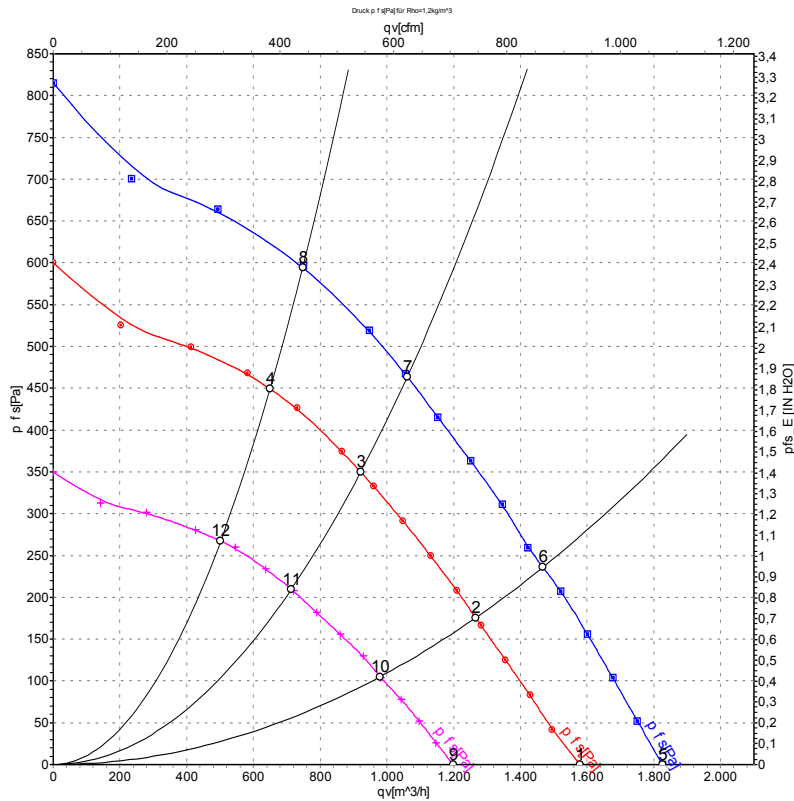

Measurement: LU-56153-1
Measurement: LU-56151-1
Measurement: LU-56152-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
	V	min ⁻¹	W	A	m³/h	Pa	cfm	inH ₂ O
1	48	2645	135	2.80	1580	0	930	0.00
2	48	2600	168	3.52	1265	176	745	0.71
3	48	2580	182	3.82	920	350	545	1.41
4	48	2590	177	3.72	650	449	385	1.80
5	57	3055	206	3.64	1825	0	1075	0.00
6	57	2990	257	4.53	1470	236	865	0.95
7	57	2970	276	4.87	1060	464	625	1.86
8	57	2980	270	4.77	750	598	440	2.40
9	36	2035	65	1.83	1200	0	705	0.00
10	36	2005	82	2.31	980	105	575	0.42
11	36	2000	88	2.46	715	210	420	0.84
12	36	2005	85	2.39	500	267	295	1.07

U = Power supply · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase